

24” bench



95” bench

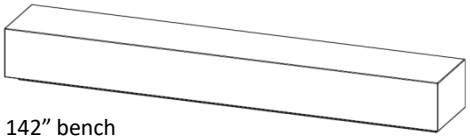

142” bench

Tools required:
- Crane or proper equipment to move bench into position
- Wood supports or straps

NOTE: Items will deliver on pallets in closed freight containers. Appropriate equipment will be required to offload from a closed container.
Flatbed delivery is possible upon request and for an additional charge.
Strapping is indicated as a method of placing the item on the project site.

INSTALLATION:
Determine placement of bench.
For freestanding bench:
1. Set in place with proper equipment such as a crane. See Fig. 1.

For fixed mounting:
For installations where permanent anchoring is required, construction adhesive for concrete may be used to secure bench to concrete pad. Refer to Fig. 2 for surface area of underside of bench. Adhesive is provided by installer.

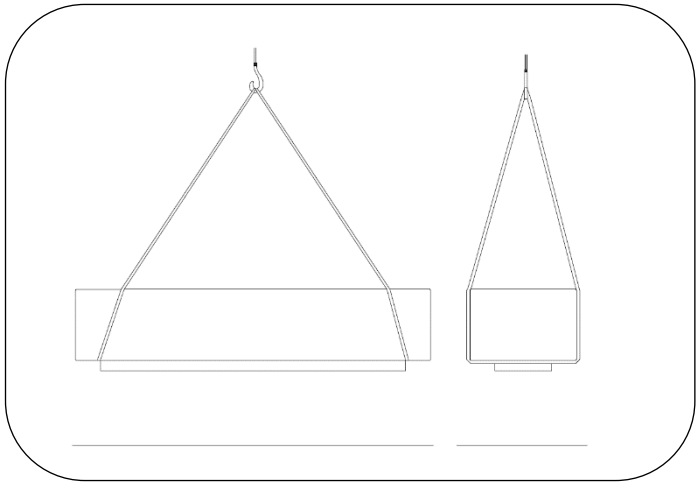

Fig. 1 – Crane install

Socrates	24" Bench	95" Bench	Bench 142"
Weight (lbs)	816	3307	5070
Area of Base (in²)	143	991	1556
Pressure (lb/in²)	5.71	3.34	3.26

Fig. 2 – weight and soil bearing

landscapeforms®