

# Arne S

## Specification Sheet

Project Name: \_\_\_\_\_


Job Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Fixture Quantity: \_\_\_\_\_

<b>Source</b>	LED
<b>Voltage</b>	120V-277V
<b>Frequency</b>	50/60 Hz
<b>EPA</b>	.36 ft <sup>2</sup>
<b>Weight</b>	8 lbs (luminaire only)

The Arne S luminaire is aluminum extrusion with a natural aluminum powdercoat finish offered by Urbidermis with a clear or opal / diffused tempered glass.

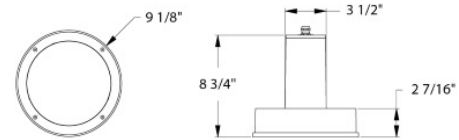

Pole & Surface Mount Luminaire										
_____	<b>Product</b>	ARPS								
_____	<b>LED Configuration</b>	8	12	C ( CoB ) *						
_____	<b>Drive Current</b>	A ( 350 mA )	B ( 500 mA )							
_____	<b>Color Temperature</b>	1 ( 3000K )	2 ( 4000K )							
_____	<b>Distribution</b>	WF ( Wide Flood )	F ( Flood )	M ( Medium )	S ( Spot Flood )	LB ( Light Blade )	Oval ( Oval )	TII ( Type 2 )	TIII ( Type 3 )	TIV ( Type 4 )
_____	<b>Lens</b>	Null ( Clear )	O ( Opal / Diffused )							
_____	<b>Color</b>	AS ( Aluminum Silver )	DK ( Dusk )							

\* CoB provides a Wide Flood distribution only.

EXAMPLE: ARPS - 8 - B - 1 - WF - AS

Catenary Luminaire *						
_____	<b>Product</b>	ARPS				
_____	<b>LED Configuration</b>	8	12	C ( CoB ) *		
_____	<b>Drive Current</b>	A ( 350 mA )	B ( 500 mA )			
_____	<b>Color Temperature</b>	1 ( 3000K )	2 ( 4000K )			
_____	<b>Distribution</b>	TII+II ( Quad Oval )	OV ( Oval )	WF ( Wide Flood )		
_____	<b>Lens</b>	Null ( Clear )	O ( Opal / Diffused )			
_____	<b>Bracket</b>	C ( Catenary )				
_____	<b>Color</b>	AS ( Aluminum Silver )	DK ( Dusk )			

\* CoB provides a Wide Flood distribution only.

EXAMPLE: ARPS - 8 - B - 1 - OV - O - C - DK

### Mounting Offering




Catenary

Mounting & Luminaire Accessories for Pole & Surface Mount Luminaire				
_____	<b>Product</b>	ARPS		
_____	<b>Bracket</b>	01 ( Column )	02S ( Surf. Mount Short )	02L ( Surf. Mount Long )
_____	<b>Color</b>	AS ( Aluminum Silver )	DK ( Dusk )	

EXAMPLE: ARPS - 02S - DK

**Mounting Offering**

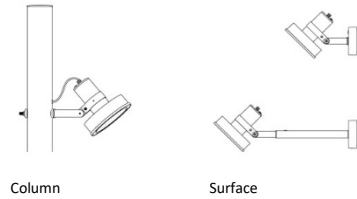

Arne S Aluminum Pole *					
Height	Pole #	Mounting	Diameter	Wall	Weight
3.4m ( 11.2 ft )	ARFS11	( 1 ) Column Bracket	Straight 4.5"	0.125"	29 lbs
4.2m ( 13.8 ft )	ARFS21	( 1 ) Column Bracket	Straight 4.5"	0.125"	33 lbs
	ARFS22	( 2 ) Column Brackets, Staggered Heights, 180° Orientation	Straight 4.5"	0.125"	33 lbs
5.0m ( 16.4 ft )	ARFS31	( 1 ) Column Bracket	Straight 4.5"	0.125"	38 lbs
	ARFS32	( 2 ) Column Brackets, Staggered Heights, 180° Orientation	Straight 4.5"	0.125"	38 lbs
5.8m ( 19.0 ft )	ARFS41	( 3 ) Column Brackets, Spiral Configuration, 120° Orientation	Straight 4.5"	0.188"	62 lbs

\* Landscape Forms can provide poles for your catenary project. Contact the factory for more information.

Pole Options								
_____	<b>Twist Lock</b>	Null ( None )	T ( Twist Lock Receptacle )					
_____	<b>Color</b>	BLK ( Black )	DSK ( Dusk )	MBK ( Matte Black )	MER ( Mercury ) *	SIL ( Silver )	SCL ( Storm Cloud )	TNM ( Titanium )

\* Mercury from Landscape Forms is our recommended color match for aluminum silver from Santa & Cole.

EXAMPLE: ARFS32 - T - MER

**Modifications**

Don't see what you are looking for? Our goal is to partner with you as the designer to manufacture solutions needed for the space you are creating. We offer the option to modify our standard product to meet certain design specifications or needs. Common modifications can include GCFI outlets, custom RAL colors, banner arm(s) mounting, and custom pole heights. Contact your local Landscape Forms representative to learn more about these offerings.

**Notes**

---



---



---



---

Please send completed forms to your Landscape Forms representative or contact us at (800) 430-6209 with any questions.