

OUTDOOR POWER


Product Data Sheet



Outdoor Power by Legrand is a family of mobile device charging stations that enable people to plug in and re-charge in the outdoor environments where they live, learn, work, care, play and travel. Outdoor Power supports connectivity with three models: a 49" high Charging Station with LED Area Light; a 46.5" high Charging Station with Accent Light; and a 34" high Power Pedestal. All provide access to power in various configurations of GFCI and/or USB outlets. An unwired option is also available for both 2-gang and 3-gang units, which makes the unit ready for dedicated low voltage applications where power is not required. The unwired 3-gang unit can accommodate the accessory A/V-Communication Kit so customers can install both power and low voltage in one unit. Other available accessories include a transparent door, color-matched doors with locks, and side-mounted shelves for holding phones and other small devices while they are charging. All three models are offered in black, bronze and silver standard finishes and all are NEMA-3R-rated for use in all weather conditions. Outdoor Charging Stations provide access to permanent, reliable, grid-based power. They are well-designed solution that smartly integrate with Landscape Forms site furniture and take power to places it's never been before.

Power Pedestal

- Station features rugged aluminum construction.
- NEMA 3R listed for use in outdoor locations.
- Aluminum body is 0.188" (4.78mm) thick and powder-coated with durable, outdoor-rated paint. Mounts into concrete with four L bolts.
- Available prewired with two or three devices, per chart below. Devices include weather-resistant 20A GFCIs and 4-port USB outlets.
- Also available unwired in two- or three-gang versions. Unwired versions can be populated with any combination of weather-resistant GFCI receptacles and USB outlets.
- Includes color-matched door, which can be easily replaced by a color-matched locking door or a transparent door.
- Interior illuminates when door is open. Door closes automatically to meet while-in-use requirements.
- A/V and communication devices can be added to unwired three-gang versions with addition of A/V-Communication Kit. Kit includes two replacement device plates to accommodate:
 - two decorator-style power devices and one decorator style A/V or communication device.
 - two decorator-style power devices and four Wiremold AVIP device plates.
- Use unwired two- or three-gang pedestal versions for dedicated low voltage applications where power is not required – no A/V-Communication kit needed.
- Product weight: 26.2 lbs

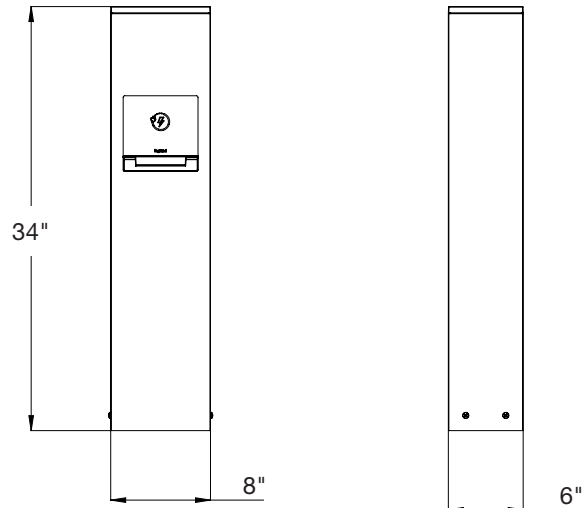


OUTDOOR POWER

Product Data Sheet



Charging Station with Accent Light

- Station features rugged aluminum construction and includes an accent LED light (7W, 4000K) for easy identification at night.
- NEMA 3R listed for use in outdoor locations.
- Aluminum body is 0.188" (4.78mm) thick and powder-coated with durable, outdoor-rated paint. Mounts into concrete with four L bolts.
- Available prewired with two or three devices, per chart below. Devices include weather-resistant 20A GFCIs and 4-port USB outlets.
- Power and lighting are prewired on separate circuits. Lighting circuit can be controlled by a timer at the panel if desired.
- Also available unwired in two- or three-gang versions. Unwired versions can be populated with any combination of weather-resistant GFCI receptacles and USB outlets.
- Includes color-matched door, which can be easily replaced by a color-matched locking door or a transparent door.
- Interior illuminates when door is open. Door closes automatically to meet while-in-use requirements.
- A/V and communication devices can be added to unwired three-gang versions with addition of A/V-Communication Kit. Kit includes two replacement device plates to accommodate:
 - two decorator-style power devices and one decorator style A/V or communication device,
 - two decorator-style power devices and four Wiremold AVIP device plates.
- Use unwired two- or three-gang pedestal versions for dedicated low voltage applications where power is not required – no A/V-Communication Kit needed.
- Product weight: 33.5 lbs

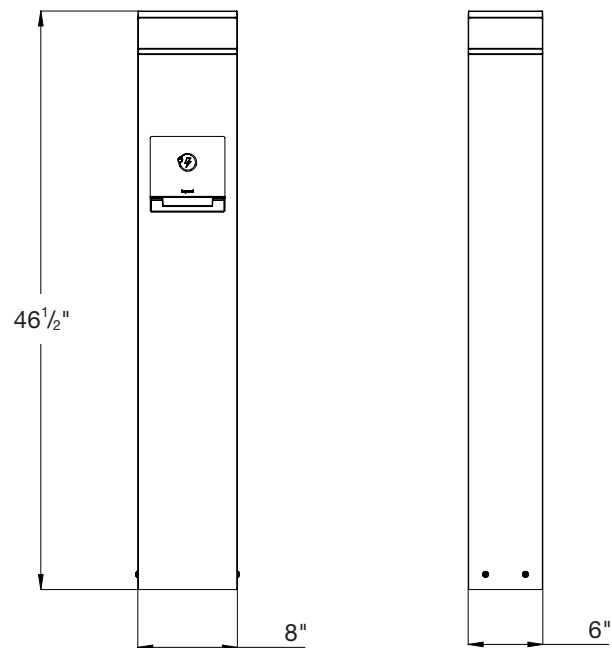



OUTDOOR POWER

Product Data Sheet




Charging Station with Area Light

- Station features rugged aluminum construction and includes an area LED light for path way illumination and easy identification at night.
- NEMA 3R listed for use in outdoor locations.
- Aluminum body is 0.188" (4.78mm) thick and powder-coated with durable, outdoor-rated paint. Mounts into concrete with four L bolts.
- Available prewired with two or three devices, per chart below. Devices include weather-resistant 20A GFCIs and 4-port USB outlets.
- Power and lighting are prewired on separate circuits. Lighting circuit can be controlled by a timer at the panel if desired.
- Also available unwired in two- or three-gang versions. Unwired versions can be populated with any combination of weather-resistant GFCI receptacles and USB outlets.
- Includes color-matched door, which can be easily replaced by a color-matched locking door or a transparent door.
- Interior illuminates when door is open. Door closes automatically to meet while-in-use requirements.
- A/V and communication devices can be added to unwired three-gang versions with addition of A/V-Communication Kit. Kit includes two replacement device plates to accommodate:
 - two decorator-style power devices and one decorator style A/V or communication device,
 - two decorator-style power devices and four Wiremold AVIP device plates.
- Use unwired two- or three-gang pedestal versions for dedicated low voltage applications where power is not required – no A/V-Communication Kit needed.
- Product weight: 34.6 lbs

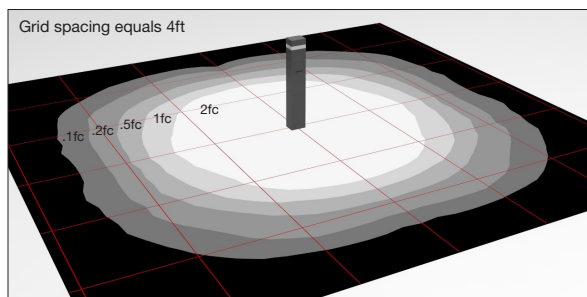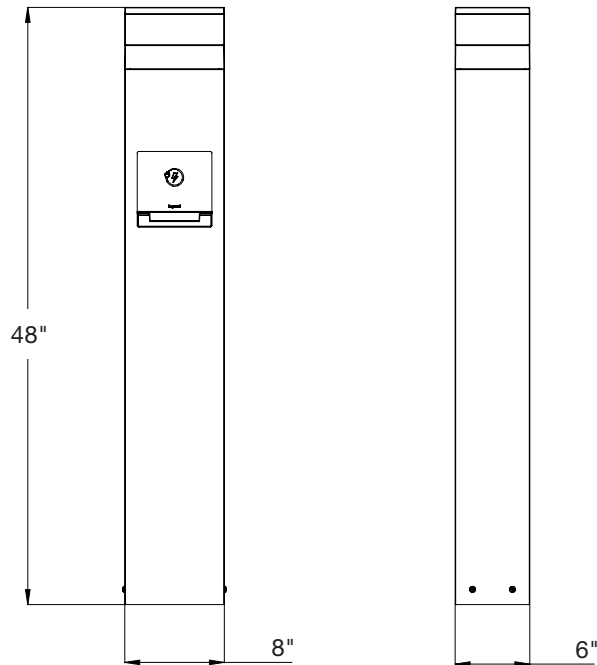

Area Light Performance

Lamp: Samsung Round-110C LED
 L70: >50,000 hrs
 Drive Current: 700mA
 Lens: Diffused Polycarbonate
 Power Supply: 100V-277V
 LED Driver: TRP LED20W-28-C0700
 Total Lumen Output: 457 Lumens
 Power Consumption: 20.8 Watts
 Color Accuracy (CRI): 84
 Color Temperature (CCT): 4000K
 BUG Rating: B0 U2 G0

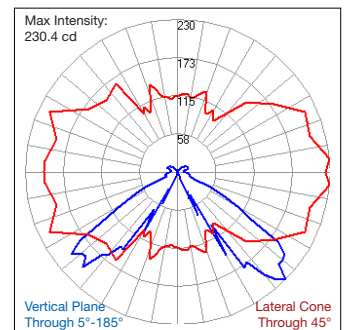

OUTDOOR POWER

Product Data Sheet




Accessories

A/V Communication Kit

- Kit enables combining power and low voltage in one three-gang pedestal.
- Includes two device plates to accommodate two decorator-style power devices and one decorator style A/V or a communication device, two decorator-style power devices, and four Wiremold AVIP device plates.
- Also includes interior divider to separate A/V or communication from high voltage wiring.
- Compatible with three-gang versions only.
- Use unwired two- or three-gang pedestal versions for dedicated low voltage applications where power is not required, no A/V-Communication kit needed.

A/V Communication Kit

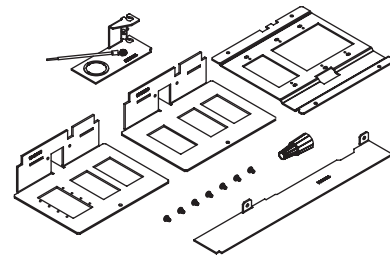

Transparent Door

- Replaces color-matched door (included).


Replacement Door

- Available for all charging stations.
- Included with initial shipment of all models.
- Available in all three standard colors.

Locking Door

- Replaces standard color-matched door (included).
- Includes standard lock and two keys.
- Available in all three standard colors.


Device Shelf Kit

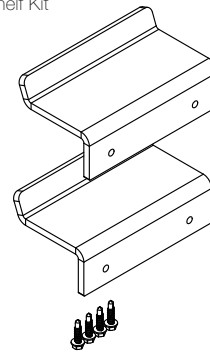


Device Shelf Kit

- Pair of shelves to hold mobile devices while charging.
- Shelves are intended to mount to the pedestal sides and have been tested to hold up to 250 lbs.
- Recommended maximum of two shelves per pedestal.
- Shelves must be mounted below door opening
- Available in L-Black and L-Silver.
- Includes four attaching screws.

Locking Door



Transparent / Replacement Door

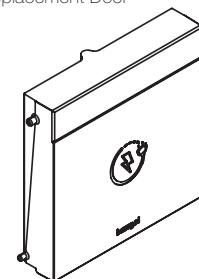

OUTDOOR POWER

Product Data Sheet



To Order

Specify: Product, Model, Power Module and Color.

Product	Model	Power Module		Color
BM Outdoor Power	PP (Power Pedestal) CSA (Charging Station with Accent Light) CSL (Charging Station with Area Light)	2UW (2-gang, Unwired)		LBLK (L-Black) LBZ (L-Bronze) LSIL (L-Silver)
		2U (2-gang, 2 4-port USB Outlets)		
		2G (2-gang, 2 Duplex GFCI Receptacles)		
		1G1U (2-gang, 1 Duplex GFCI Receptacle & 1 4-Port USB Outlet)		
		3UW (3-gang, Unwired)		
		1G2U (3-gang, 1 Duplex GFCI Receptacle & 2 4-Port USB Outlets)		
		2G1U (3-gang, 2 Duplex GFCI Receptacles & 1 4-Port USB Outlet)		

EXAMPLE: BM – CSL – 2G1U – LSIL

Accessories

Product	Model	Color
BM Outdoor Power	RDR (Replacement Door)	LBLK (L-Black)
	LDR (Locking Door)	LBZ* (L-Bronze)
	DSF (Device Shelf Kit)	LSIL (L-Silver)
	TDR (Transparent Door)	No Color Choices
	AVM (A/V-Communication Kit)	

EXAMPLE: BM – RDR – LBLK

*Not available for Device Shelf Kit

OUTDOOR POWER

Product Data Sheet



Finishes

- Aluminum bodies are powder-coated with durable, outdoor-rated paint.
- Available in three standard colors: L-Black, L-Bronze, and L-Silver

Other

- Outdoor Charging Stations are UL listed to meet NEMA 3R requirements for use in outdoor locations
- Outdoor Charging Stations comply with ADA guidelines.



Designed by Legrand

Visit our landscapeforms.com for more information. Specifications are subject to change without notice. Landscape Forms supports the Landscape Architecture Foundation at the Second Century level. ©2016 Landscape Forms, Inc. Printed in U.S.A.