

# Hawthorne Path Light

landscapeforms®

## Product Data Sheet



The three-foot-tall Hawthorne path light echoes the design of its taller companion. Its multiple posts spread as they rise from their base to house a LED luminaire with sealed thermoformed lens. Hawthorne is made of cast aluminum and comes with a durable stainless steel base plate. Mounting template and anchor hardware included for ease of installation.

### General Description

- Aluminum structure with a steel base
- Cast aluminum LED cartridge and structure, stainless steel base plate
- Surface mounted; base plate mounting template included
- Asymmetrical and symmetrical distribution types available
- International Dark-Sky approved
- UL Listed, suitable for wet locations

### Electrical

100V-277V 50/60 Hz, Class 2 LED driver mounted within integrated cast aluminum base cabinet. LED cartridge with weatherproof quick-disconnect provides ease of serviceability. Hawthorne ships prewired and fully assembled.

### Hawthorne Type 4

#### Type 4 Distribution

**CCT:** 2700K, 3000K, 3500K, 4000K

**Drive Current:** 350mA

**Optic:** Khatod Collimators

**Lens:** Diffused Acrylite®

**Power Supply:** 100V-277V

**LED Driver:** 7W

**BUG Rating:** B1-U1-G1

**IP Rating:** IP66 for LED

Cartridge

**Weight:** 34 lbs

### Hawthorne Type 5

#### Type 5 Distribution

**CCT:** 2700K, 3000K, 3500K, 4000K

**Drive Current:** 350mA

**Optic:** Khatod Collimators

**Lens:** Diffused Acrylite®

**Power Supply:** 100V-277V

**LED Driver:** 12W




**BUG Rating:** B1-U1-G1

**IP Rating:** IP66 for LED




Cartridge

**Weight:** 34 lbs

### Hawthorne Type 4

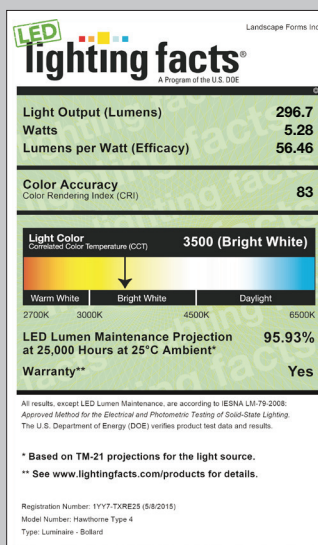

### Hawthorne Type 5

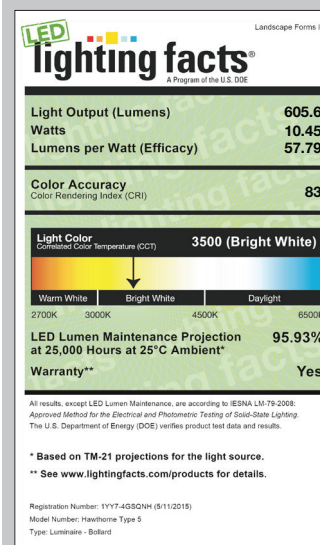

# Hawthorne Path Light

landscapeforms®

## Product Data Sheet



### Finish

Pangard II®, offered exclusively by Landscape Forms, is a 19 step program of cleaning, priming, and powdercoating that resists rusting, chipping, peeling and fading to produce the finest metal finish available for site furniture and outdoor lighting. In addition, Pangard II® contains no heavy metals and is free of Hazardous Air Pollutants.

### To Order

Specify: Product, Lamp, Drive Current, Color Temperature, Input Voltage, Mounting Option, and Powdercoat Color.

Product	Lamp	Drive Current	Color Temp.	Input Voltage	Mounting
HW Hawthorne	006L4 ( 6 LED, Type 4 ) 012L5 ( 12 LED, Type 5 )	035F ( 350 mA )	40K ( 4000K ) 35K ( 3500K ) 30K ( 3000K ) 27K ( 2700K )	UV1 ( 100-277VAC )	SM ( Surface Mount )

EXAMPLE: HW – 006L4 – 035F – 35K – UV1 – SM – Powdercoat Color

### Product Modifications

Don't see what you are looking for? Our goal is to partner with you as the designer to manufacture solutions needed for the space you are creating. We offer the option to modify our standard product to meet certain design specifications or needs. Contact your local Landscape Forms representative to learn more about these offerings.

### Warranty

LED lighting products are warranted for six years.


### Certifications

UL Listed, CE, RoHS Compliant, Dark-Sky Approved



Hawthorne is designed by Robert A.M. Stern Architects

[Click here](#) for patent information related to this product.

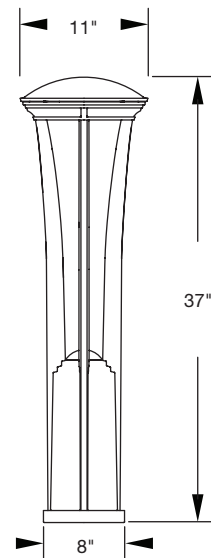

Visit [landscapeforms.com](https://landscapeforms.com) for more information. Specifications are subject to change without notice. Landscape Forms supports the Landscape Architecture Foundation at the Second Century level. ©2022 Landscape Forms, Inc. Printed in U.S.A.

[landscapeforms.com](https://landscapeforms.com) | [specify@landscapeforms.com](mailto:specify@landscapeforms.com)